


ELSIE DAYBED TRUNDLE

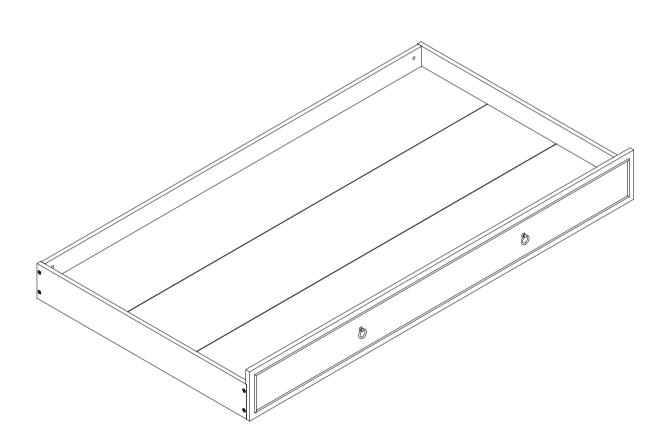

Important safety instructions:

- Please read all instructions carefully before assembling this Trundle.
- For your safety, assembly by two or more adults is strongly recommended.
- Keep these instructions for future use.
- Use only vendor-supplied hardware to assembly this item. Using unauthorized hardware could jeopardize the structural integrity of the item.

Pre- assembly:

- Remove all parts and hardware from the box. Place all items on a carpeted or scratch-free work surface, as this will avoid damaging parts. The shipping box provides an ideal work surface.
- To avoid accidentally discarding small parts or hardware, please do not dispose of any contents until assembly is complete.
- Two people are recommended for your safety and ease of assembly.
- Prior to starting this assembly, use the parts and hardware lists to identify and separate each of the pieces included.
- The illustrations provided allow for easier assembly when used in conjunction with the assembly instructions.
- Note: Do not fully tighten any of the bolts until all parts are in place. Failure to follow these instructions may cause the bolts to misalign during assembly.
- Please use caution if using power tools to aid in assembly. Power tools can damage the hardware or split the wood.

Part included:

A – Front Panel (x1)

B – Back Panel (x1)


C – Side Rail (x2)

- D Side Bottom Panel with protruding edge (x2)
- E Middle Bottom Panel with sunken edge (x1)

F –Bottom Board Support (x2)

Hardware included:

<u>G – Ball Tip Allen Key</u>	H – Hex Bolt	I –Barrel Nut	J –Pan Head Screw	K- Pan Head Screw
G	Н	I	J	К
(4x95x30mm)	المسلمسلمان 1/4"x63x13mm	1/4"x11x10mm	8x38mm	8x25mm
1 pc	8 pcs	8 pcs	12 pcs	10 pcs

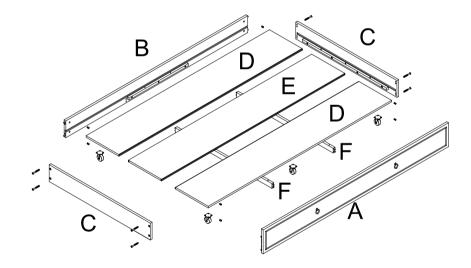

L- Small Pan Head Screw M - Castor


 L
 M

 Image: Second science
 Image: Second science

 8x12mm
 50x50x65mm


 24 pcs
 6 pcs

TOOLS REQUIRED (but not included): Phillips Head Screwdriver




Assembly Instruction Steps:


- 1. Place the 2 Side Bottom Panels (D) with the pre-drilled holes facing up.
- Slot the protruding edges of the Side Bottom Panels (D) into the sunken edges of the Middle Bottom Board (E), as seen in the illustration below.
- 3. Align the wooden dowels on the Bottom Board Support (F) with the pre-drilled holes at the bottom of the Side Bottom Panels (D).
- 4. Screw the Bottom Board Support (F) to the Bottom Boards with 12 Pan Head Screws 38x8mm (J), as shown in the illustration below.

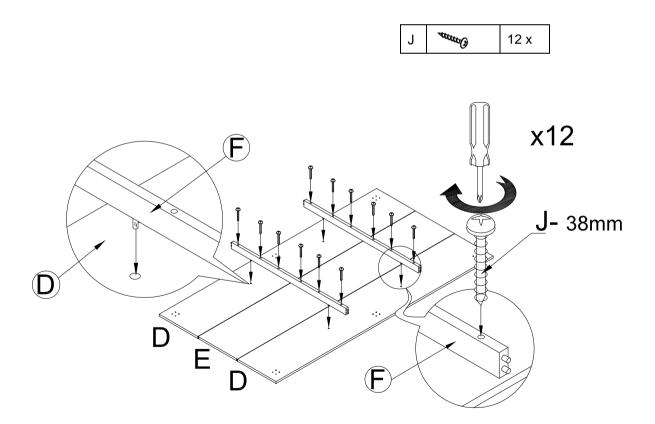

5. Fasten the 6 Casters (M) to the Side Bottom Panels (D) and secure with 6 Short Pan Head Screws 17x8mm (L). Make sure to use the pre-drilled holes of the Side Bottom Boards (D) as a guide.

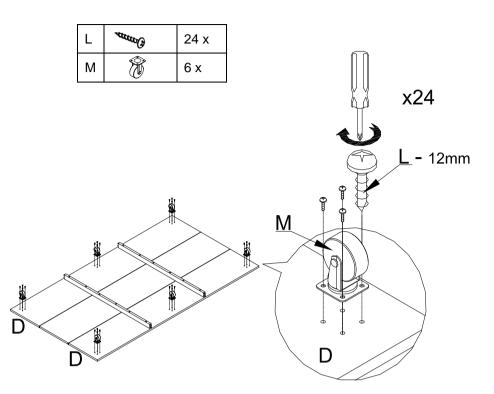


- 6. Turn the assembled piece to the upright position.
- Attach the Front Panel (A) and Back Panel (B) to the Side Bottom Panels by aligning the pre-fixed wooden dowels at the end of Bottom Board Support (F), to the pre-drilled holes on the Front Panel (A) and Back Panel (B), as seen in the illustration below.
- 8. Press firmly to ensure the Side Bottom Panels (D) sit well into the slots of the Front Panel (A) and Back Panel (B), as seen below.

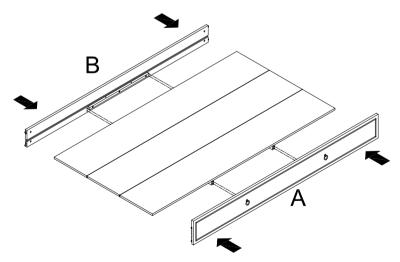


- 9. Attach the 2 Side Rails (C) to Front Panel (A) and Back Panel (B), by aligning the pre-fixed wooden dowels at the ends of the Front and Back Panel to the pre-drilled holes of the Side Rail (C), as seen in the illustration below.
- 10. Secure with 8 Hex Bolts (H) and 8 Barrel Nuts (I), as shown in the illustration below.
- 11. Tighten all bolts with Allen Key (G).

Date: 2013-Nov.-04 Rev:

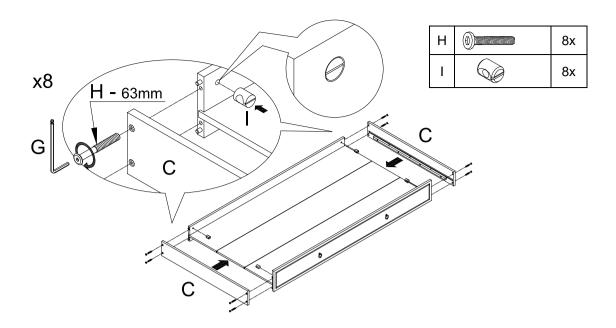

- 12. With the help of another person, turn the assembled Trundle over.
- 13. Tighten the 10 Pan Head Screws 25x8mm (K) through the pre-drilled holes on the cleats of Panels (A,B & C) and into the Bottom Boards (D & E), as shown in the illustration below.
- 14. Assembly is complete.

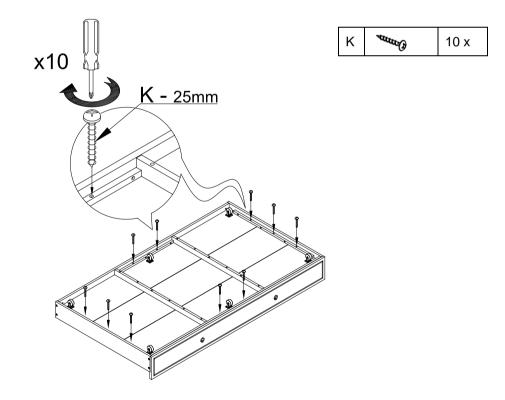

CARE INSTRUCTIONS:

- Dust often using a clean, soft, dry, and lint-free cloth.
- Blot spills immediately and wipe with a clean, damp cloth.
- We do not recommend the use of chemical cleansers, abrasives, or furniture polish on our lacquered finish.
- Hardware may loosen over time. Periodically check to make sure all connections are tight. Re-tighten if necessary.

Date: 2013-Nov.-04 Rev: